


DATE: _____ PROJECT: _____ LOCATION: _____ TYPE: _____

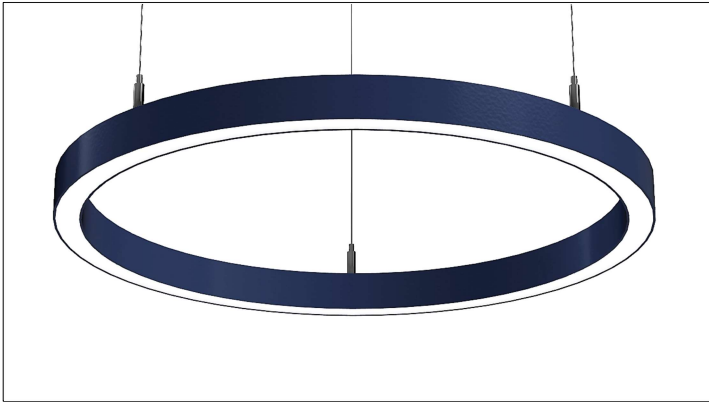

FEATURES

- Available in made to measure lengths accurate up to 1/16".
- Patterns available. Must consult factory for custom size and patterns.
- Damp location rated.
- Available in CRI 80+, CRI 90+.
- 5 year, 50,000 hour fixture warranty.
- 2700K, 3000K, 3500K, 4000K & 5000K color temperatures available.
- Available with PoE- Must consult factory.

APPLICATIONS

Commercial and business area, public buildings, offices, retail stores, hotels and restaurants, arts and culture spaces.

FINISH

Standard powder-coated white. custom colors available.

CONSTRUCTION

Rolled aluminum housing.

DIFFUSER

Custom formulated high diffusion extruded acrylic lens. Other diffuser available - Consult factory.


FIXTURE RATINGS & CERTIFICATIONS




ELECTRICAL

Remote driver with 0-10V dimming standard. Remote emergency battery (Optional). Several driver options available.

EXTRUSION DIMENSIONS




LIGHT DISTRIBUTION

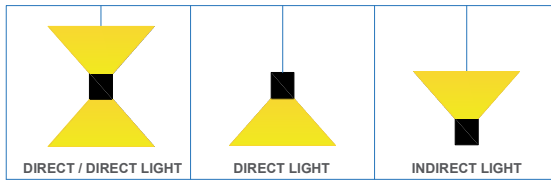


LED SYSTEM OUTPUT

| OUTPUT | System Watts | | Delivered Lumens | |
|--------|---------------|----------|------------------|-----------|
| | DIRECT | INDIRECT | DIRECT | INDIRECT |
| OP1 | 4 W/ft | 4 W/ft | 380 lm/ft | 380 lm/ft |
| OP2 | 6 W/ft | 6 W/ft | 570 lm/ft | 570 lm/ft |
| OP3 | 8 W/ft | 8 W/ft | 760 lm/ft | 760 lm/ft |
| OP4 | 10 W/ft | 10 W/ft | 950 lm/ft | 950 lm/ft |
| OP5 | Custom Output | | Custom Output | |

MOUNTING



PATTERN DIMENSIONS



Total Fixture Wattage = Perimeter (ft) X Output (W/ft)

Fixture lumen output data refer to delivered lumens for 3500K. Lumens multiplier 80CRI :0.92 for 27K, 0.95 for 30K & 35K, 1.05 for 40K. Consult factory for other lumen package.

ORDERING KEY



| 1 - MODEL # | 2 - LENGTH | 3 - CRI | 4 - COLOR TEMP | 5 - LED OUTPUT | | 6 - VOLTAGE |
|-------------|---|------------------|--|--|---|---|
| LUM-RING 1P | 2FT - (A) 2ft 4FT - (A) 4ft 6FT - (A) 6ft XFT - Custom Size (Consult Factory) *A -Reflects Outside Diameter of fixture. | 80 CRI 90 CRI | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K TW - Tunable White RGB - Color Tuning 1 RGBW - Color Tuning 2 | D - DIRECT OP1 - 4 W/ft OP2 - 6 W/ft OP3 - 8 W/ft OP4 - 10 W/ft OP5 - Custom Output | ID - INDIRECT OP1 - 4 W/ft OP2 - 6 W/ft OP3 - 8 W/ft OP4 - 10 W/ft OP5 - Custom Output | UNV - Universal (120/277V) 347V* - 347V *Must use DB Driver |

| 7 - DRIVER | 8 - FINISH | 9 - MOUNTING | 10 - OTHER OPTIONS |
|--|---|--|---|
| DIM 1% - Standard 1% Dimming (0-10V) DIM 0.1%- 0.1% Dimming (0-10V) LT1 - Lutron Digital EcoSystem C1 - Tunable White control C2 - RGB Tuning control C3 - RGBW Tuning control PoE - Power over Ethernet. Consult Factory for Compatibility | W - White (Standard) BLK* - Black CC* - Custom Color (Provide RAL#) *White cord and canopy provided. | AC - Air Cable Mount-50" PS- Pendant Stem (12", 18", 24", 36", 48") | DC - Dual Circuit (Separate Up/Down Control) EM1 - Emergency Pack-120V EM2 - Emergency Pack 277V EMCKT - Emergency Circuit |