

DATE: _____ PROJECT: _____ LOCATION: _____ TYPE: _____



FEATURES


Our LUM-TW 2 IN 1 flexible LED strip light combines warm white and cool white LEDs into a single node for seamless blending and purest white tones. Adjust color temperature with precision and ease. Peel-and-stick 3M™ adhesive backing enables fast, easy mounting.

- LUM-TW 2 in 1 LED spacing in high output performance.
- Tunable white from 1800K to 6500K-alternating LEDs.
- Lumen output available in 335 lm/ft & 385 lm/ft.
- Cutable every 2".
- IP54 Rating featuring nano-coating protective layer (Standard) - Consult factory for other option.
- Dimmable (5-100%) with most ELV, TRIAC dimmers.
- cULus listed for Indoor dry/damp locations.
- 50,000 hours rated life / 5-year limited warranty.


QUICK SPECIFICATION

- **VOLTAGE** : 24V
- **WATTAGE** : 4.39W / ft & 5.85W / ft
- **LUMENS** : Up to 335 Lm / ft & 385 Lm / ft
- **CCT** : 1800K-6500K (2 in 1 LEDs)
- **CRI** :90+
- **BEAM ANGEL** :120°
- **CUTTING POINTS** : ~ 1" (25mm)
- **IP RATING** : IP54 - Standard, IP65, IP67, IP68
- **DIMMING** : TRIAC / ELV (5 - 100%)
- **OPERATING TEMP** : 5°C (41°F) to 70°C (158°F)
- **CERTIFICATIONS** : cULus Listed - Dry / Damp Location
- **RATED LIFE** : 50,000 Hours


DIMENSIONS

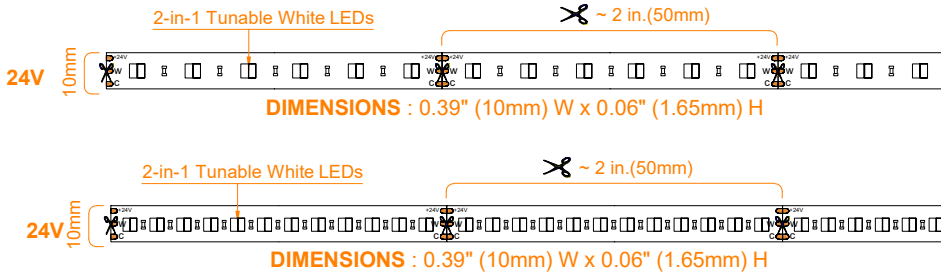


IP54 NonWaterproof




IP65 Waterproof



IP67 Waterproof




IP68 Waterproof



FIXTURE RATINGS & CERTIFICATIONS



ORDERING KEY



1 - MODEL #	2 - LENGTH	3 - VOLTAGE	4 - CCT	5 - LED OUTPUT - LED QTY (pcs/ft) - CUT POINT (in)- MAX RUN (ft)	6 - IP RATING
LUM-SMD TW 90+ CRI	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft 10 - 10 ft X'-X'' - CSTM	24V DC	Tunable White 1800K-6500K	OP1 (24V) - 4.39 W/ft (335 lm/ft) - 36 pcs/ft - 6 LED (2 in) - 16 ft MAX	IP54 - Standard IP65 - Silicon IP67 - Silicon Tube IP68 - Silicon Tube +Resin
				OP2 (24V) - 5.85 W/ft (385 lm/ft) - 73 pcs/ft - 12 LED (2 in) - 13 ft MAX	
COMMENT					

LUMIYO TAPE LIGHT SERIES QUICK SET-UP GUIDE

