

DATE: _____ PROJECT: _____ LOCATION: _____ TYPE: _____



FEATURES

- Available In made to measure lengths accurate up to 1/16".
- Standard Oak wood -Various wood & stain option is available - Consult Factory.
- Patterns available. Must consult factory for custom size and patterns.
- Damp location rated.
- Available in CRI 80+, CRI 90+.
- 5 year, 50,000 hour fixture warranty.
- 2700K, 3000K, 3500K, 4000K & 5000K color temperatures available.
- Available with PoE- Must consult factory.

APPLICATIONS

Commercial and business area, public buildings, offices, retail stores, hotels and restaurants, arts and culture spaces.

FINISH

Standard powder-coated white. Custom colors available.

CONSTRUCTION

Extruded aluminum housing with die cast ends.
Wood: Oak Wood (Standard).

DIFFUSER

Custom formulated high diffusion extruded acrylic lens.
Other diffuser available - consult factory.


FIXTURE RATINGS & CERTIFICATIONS




ELECTRICAL

Remote driver with 0-10V dimming standard. Remote emergency battery (Optional). Several driver options available.

DIMENSIONS



LIGHT DISTRIBUTION

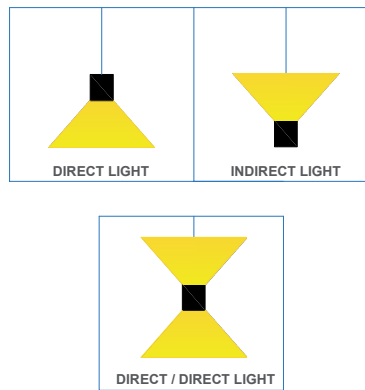


LED SYSTEM OUTPUT

OUTPUT	System Watts		Delivered Lumens	
	DIRECT	INDIRECT	DIRECT	INDIRECT
OP1	4 W/ft	4 W/ft	380 lm/ft	380 lm/ft
OP2	6 W/ft	6 W/ft	570 lm/ft	570 lm/ft
OP3	8 W/ft	8 W/ft	760 lm/ft	760 lm/ft
OP4	10 W/ft	10 W/ft	950 lm/ft	950 lm/ft
OP5	Custom Output		Custom Output	

Fixture lumen output data refer to delivered lumens for 3500K.
Lumens multiplier 80CRI :0.92 for 27K, 0.95 for 30K & 35K, 1.05 for 40K.
Consult factory for other lumen package.

MOUNTING

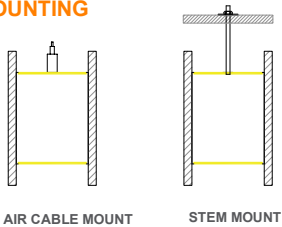



ORDERING KEY



1 - MODEL #	2 - LENGTH	3 - CRI	4 - COLOR TEMP	5 - LED OUTPUT		6 - VOLTAGE
LUM-WOOD 1P	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft 10 - 10 ft X'-X'' - Custom Length PAT - Pattern (Consult Factory)	80 CRI 90 CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K TW - Tunable White RGB - Color Tuning 1 RGBW - Color Tuning 2	D - DIRECT OP1 - 4 W/ft OP2 - 6 W/ft OP3 - 8 W/ft OP4 - 10 W/ft OP5 - Custom Output	ID - INDIRECT OP1 - 4 W/ft OP2 - 6 W/ft OP3 - 8 W/ft OP4 - 10 W/ft OP5 - Custom Output	UNV - Universal (120/277V) 347V* - 347V *Must use DB Driver

7 - DRIVER	8 - FINISH	9 - MOUNTING	10 - OTHER OPTIONS
DIM 1% - Standard 1% Dimming (0-10V) DIM 0.1%- 0.1% Dimming (0-10V) LT1 - Lutron Digital EcoSystem C1 - Tunable White control C2 - RGB Tuning control C3 - RGBW Tuning control PoE - Power over Ethernet. Consult Factory for Compatibility	HOUSING COLOR W - White (Standard) BLK* - Black CC* - Custom Color (Provide RAL#) WD* - Oak Wood Stain (Provide RAL#) *White cord and canopy provided.	AC - Air Cable Mount-50" PS- Pendant Stem (12", 18", 24", 36", 48")	DC - Dual Circuit (Separate Up/Down Control) EM1 - Emergency Pack-120V EM2 - Emergency Pack 277V EMCKT - Emergency Circuit *Emergency Battery Available in modules of 4-ft. and longer

DATE: _____ PROJECT: _____ LOCATION: _____ TYPE: _____

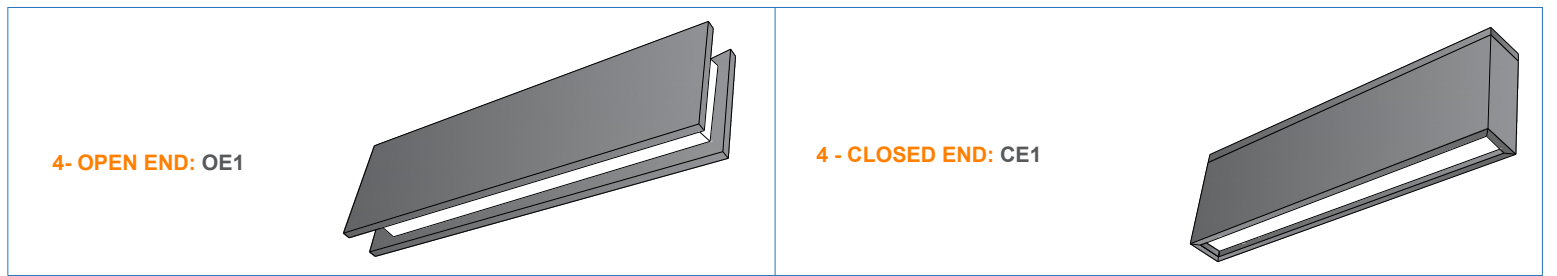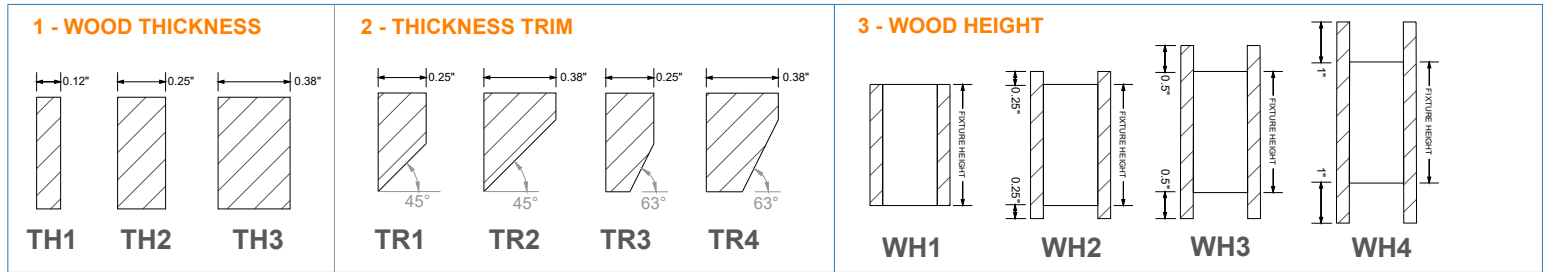

5- WOOD TYPE _____ 6- WOOD STAIN COLOR _____

WOOD SWATCHES

						
PINE	MAPLE	POPLAR	ALDER	BIRCH	ASH	BEECH
						
WALNUT	OAK	HICKORY	CHERRY	MAHOGANY	EBONY	PAINTED

ORDERING KEY

		
1	2	3
		
4	5	6

COMMENT

DATE:

PROJECT:

LOCATION:

TYPE:

POPULAR PRE - MIXED COLORS



Red Mahogany
B3508



Golden Oak
B3510



Ebony
B3506



Provincial
B3526



English Chestnut
B3520



Early American
B3516



Jacobean
B3504



Special Walnut
B3514



Gunstock
B3530



Golden Pecan
B3522



Espresso
B3518



Classic Gray
B3512



Red Oak
B3528



Natural
B3524



Dark Walnut
B3502

Colors shown on this printed piece may vary slightly from actual product due to aging, lighting, and printing process. Color samples simulate stain colors on Oak.

DATE:


PROJECT:

LOCATION:


TYPE:

CUSTOM COLORS


CLASSIC COLORS

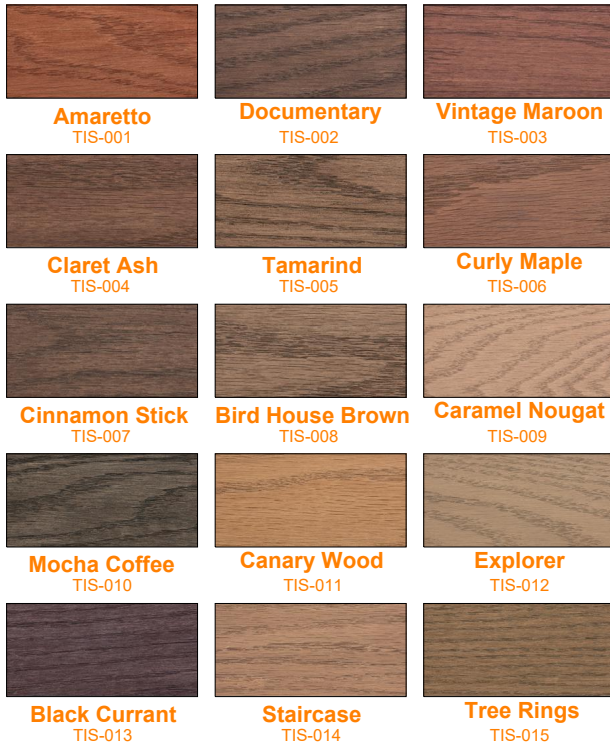

ACCENT COLORS

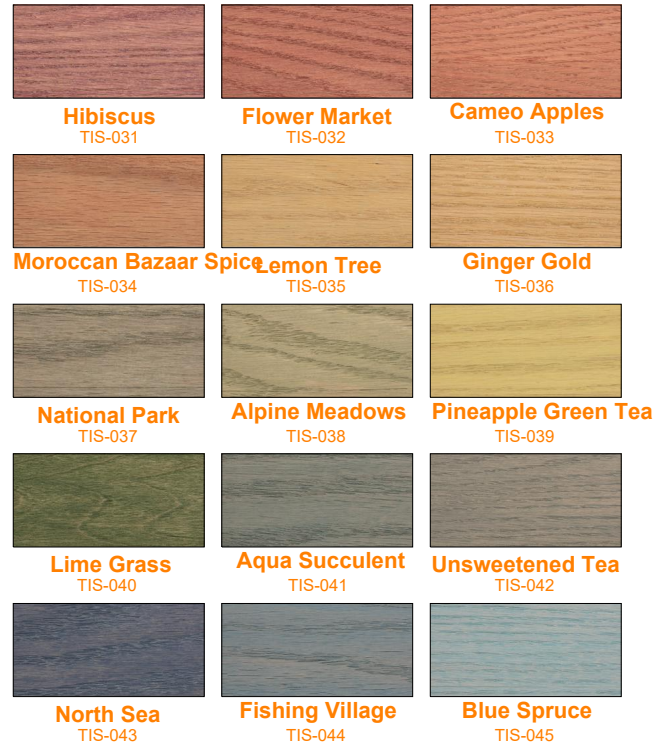

CONTEMPORARY COLORS

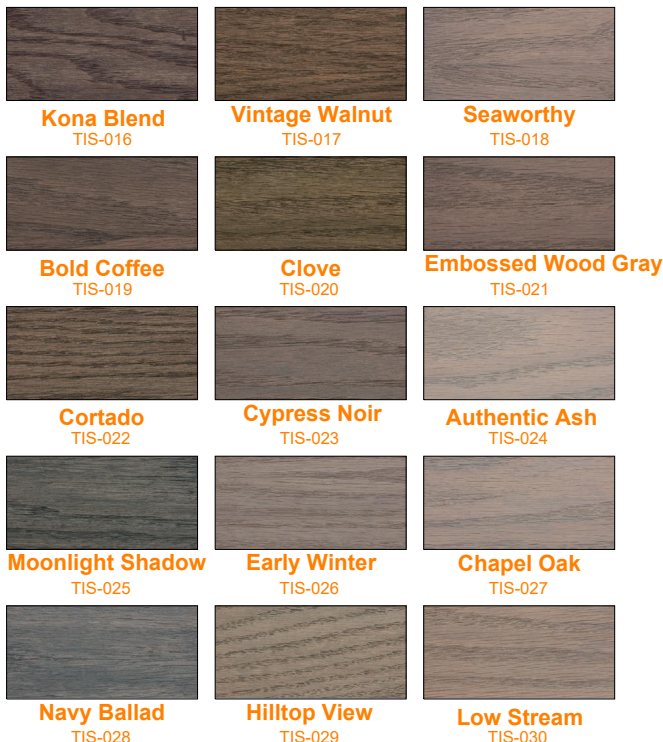

CASUAL COLORS



Colors shown on this printed piece may vary slightly from actual product due to aging, lighting, and printing process. Color samples simulate stain colors on Oak.