

LUM-WOOD 3SM

DATE:

PROJECT:


LOCATION:

TYPE:

		 FEATURES Available In made to measure lengths accurate up to 1/16". Standard Oak wood -Various wood & stain option is available - Consult Factory. Patterns available. Must consult factory for custom size and patterns. Damp location rated. Available in CRI 80+, CRI 90+. 5 year, 50,000 hour fixture warranty. 2700K, 3000K, 3500K, 4000K & 5000K color temperatures available. Available with PoE- Must consult factory. 					
		APPLICATIONS Commercial and business area, public buildings, office stores, hotels and restaurants, arts and culture spaces.					
		FINISH	Standard powder-coated white. Custom colors available.				
CONSTRUCTION	ION Extruded aluminum housing with die cast ends. Wood: Oak Wood (Standard).		Custom formulated high diffusion extruded acrylic lens. Other diffuser available - consult factory.				
FIXTURE RATINGS & CERTIFICATIONS	Intertek MADE IN USA DayLight Harvest MOTION SENSOR		DAMP LOCATION S VEAR				
ELECTRICAL	Integral driver with 0-10V dimming standard. Integra	emergency battery (Optional). Several driver options available.				
DIMENSIONS		LED SYS					



MOUNTING



LIGHT DISTRIBUTION

DIRECT LIGHT

LED SYSTEM OUTPUT

OUTPUT	System Watts	Delivered Lumens				
OUTPUT	DIRECT	DIRECT				
OP1	4 W/ft	380 lm/ft				
OP2	6 W/ft	570 lm/ft				
OP3	8 W/ft	760 lm/ft				
OP4 10 W/ft		950 lm/ft				
OP5 Custom Output		Custom Output				

Fixture lumen output data refer to delivered lumens for 3500K. Lumens multiplier 80CRI :0.92 for 27K, 0.95 for 30K & 35K,1.05 for 40K. Consult factory for other lumen package.

SURFACE MOUNT

	1	2	3	4	5	6		7	8	9	10	11	12
1 - MODEL #	2 -	LENGTH	3 - CRI	4 - C(OLOR TEMP		5 -	LED OUTP	TUT	7 - FIN	ISH	6 - V	OLTAGE
LUM-WOOD 3SM	PAT -		80 CRI 90 CRI	RGB - Co	00K 00K 00K		OP2 - OP3 - OP4 -	RECT 4 W/ft 6 W/ft 8 W/ft 10 W/ft Custom Ou	ıtput	W - White BLK* - Bla CC* - Cust (Provide R *White cor canopy pro	tom Color AL#) d and	347V* -	Jniversal (120/277V) · 347V ise DB Driver

8 - DRIVER	9 - MOUNTING	10 - SENSOR	11 - OTHER OPTIONS	
 DIM 1% - Standard 1% Dimming (0-10V) DIM 0.1% - 0.1% Dimming (0-10V) LT1 - Lutron Digital EcoSystem C1 - Tunable White control C2 - RGB Tuning control C3 - RGBW Tuning control PoE - Power over Ethernet. Consult Factory for Compatibility 	SM - Surface Mount - 2" Stud SM1 - Surface Mount - Bracket	OS - Occupancy Sensor VS - Vacancy Sensor DH - Daylight Harvesting ES - Enlighted Sensor	EM1 - Emergency Pack-120V EM2 - Emergency Pack 277V EMCKT - Emergency Circuit *Emergency Battery Available in modules of 4-ft. and longer	



LUM-WOOD/STAIN



ILUMIYO LLC.

T: 203-881-6062

ILUMIYO LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

WWW.ILUMIYO.COM



LOCATION:

TYPE:

LUM-WOOD/STAIN

POPULAR PRE - MIXED COLORS



Red Mahogany B3508 Golden Oak B3510 Ebony B3506 Provincial B3526



English Chestnut B3520



Early American B3516



Jacobean B3504



Special Walnut B3514





Colors shown on this printed piece may vary slightly from actual product due to aging, lighting, and printing process. Color samples simulate stain colors on Oak.

ILUMIYO LLC.




LOCATION:

TYPE:

LUM-WOOD/STAIN

CUSTOM COLORS

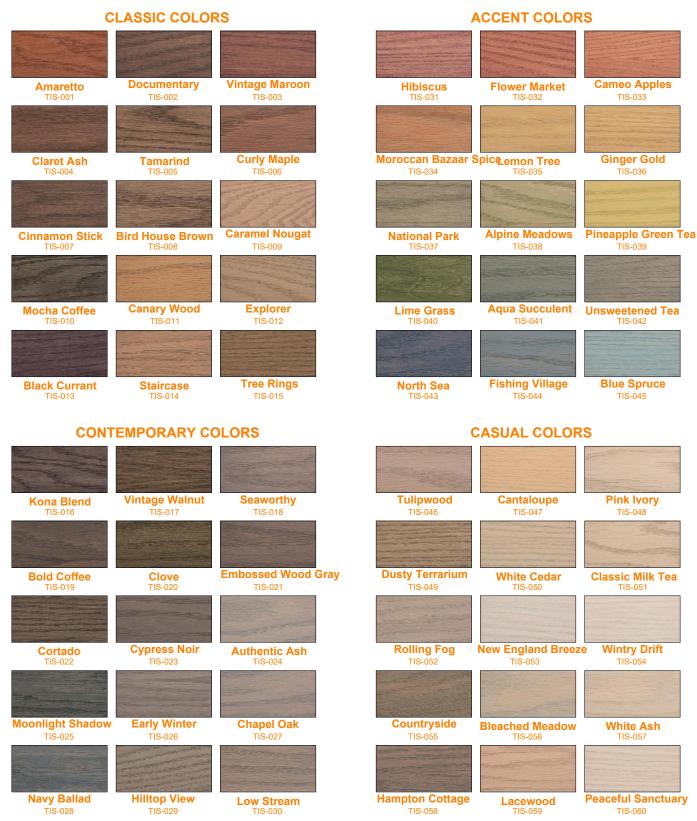

Colors shown on this printed piece may vary slightly from actual product due to aging, lighting, and printing process. Color samples simulate stain colors on Oak.

ILUMIYO LLC.

ILUMIYO LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.