


DATE: _____ PROJECT: _____ LOCATION: _____ TYPE: _____

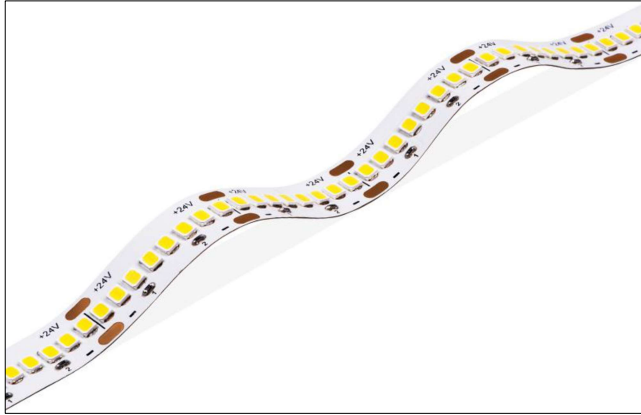

FEATURES


LUM-SMD 2835 tape light utilizes a powerful new type of LED to achieve substantially more lumens per foot while using less watts per foot.

- LUM-SMD 2835 LED spacing in high output performance.
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, 6000K and R/G/B.
- 90+ Color Rendering Index.
- Lumen output available in 310 lm/ft, 516 lm/ft and 686 lm/ft.
- Cuttable every 2" and 1".
- Easy installation featuring 3M VHB adhesive backing.
- IP54 rating featuring nano-coating protective layer (Standard) - Consult factory for other option.
- Dimmable (5-100%) with most ELV, TRIAC dimmers.
- cULus listed for Indoor dry/damp locations.
- 50,000 hours rated life / 5-year limited warranty.


QUICK SPECIFICATION

- **VOLTAGE** : 12V/24V
- **WATTAGE** : 3.29W / ft , 5.48W / ft & 7.3W / ft
- **LUMENS** : Up to 310 Lm / ft , 516 Lm / ft & 686 Lm / ft
- **CCT** : 2700K / 3000K / 3500K / 4000K / 5000K / 6000K
- **CRI** : 90+
- **BEAM ANGEL** : 120°
- **CUTTING POINTS** : ~ 1" (25mm) / ~ 2" (50mm)
- **IP RATING** : IP54 - Standard, IP65, IP67, IP68
- **DIMMING** : TRIAC / ELV (5 - 100%)
- **OPERATING TEMP** : 5°C (41°F) to 70°C (158°F)
- **CERTIFICATIONS** : cULus Listed - Dry / Damp Location
- **RATED LIFE** : 50,000 Hours


DIMENSIONS

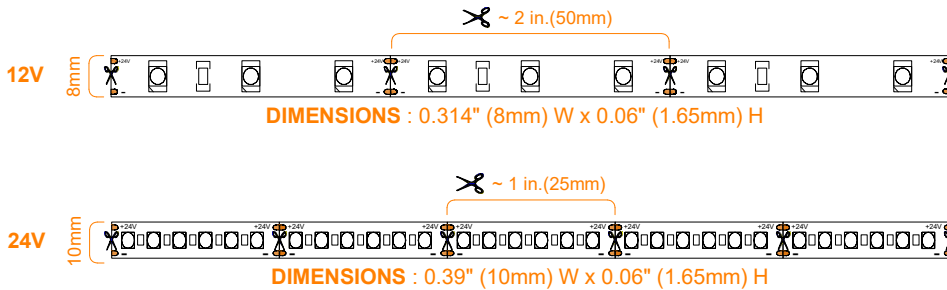


IP54 NonWaterproof




IP65 Waterproof



IP67 Waterproof




IP68 Waterproof



FIXTURE RATINGS & CERTIFICATIONS



ORDERING KEY



1 - MODEL #	2 - LENGTH	3 - VOLTAGE	4 - CCT	5 - LED OUTPUT - LED QTY (pcs/ft) - CUT POINT (in) - MAX RUN (ft)	6 - IP RATING
LUM-SMD 2835 90+ CRI	2 - 2 ft	12V DC	27K - 2700K	OP1 (12V) - 3.29 W/ft (310 lm/ft) - 18 pcs/ft - 3 LED (2 in) - 27 ft MAX OP2 (12V) - 5.48 W/ft (516 lm/ft) - 36 pcs/ft - 3 LED (1 in) - 15.5 ft MAX OP3 (24V) - 7.3 W/ft (686 lm/ft) - 75 pcs/ft - 6 LED (1 in) - 11.5 ft MAX	IP54 - Standard IP65 - Silicon IP67 - Silicon Tube IP68 - Silicon Tube +Resin
	4 - 4 ft	24V DC	30K - 3000K		
	6 - 6 ft		35K - 3500K	COMMENT	
	8 - 8 ft		40K - 4000K		
	10 - 10 ft		50K - 5000K		
	X'-X'' - CSTM		60K - 6000K		
			R - RED		
			G - GREEN B - BLUE		

LUMIYO TAPE LIGHT SERIES QUICK SET-UP GUIDE

