


DATE: _____ PROJECT: _____ LOCATION: _____ TYPE: _____

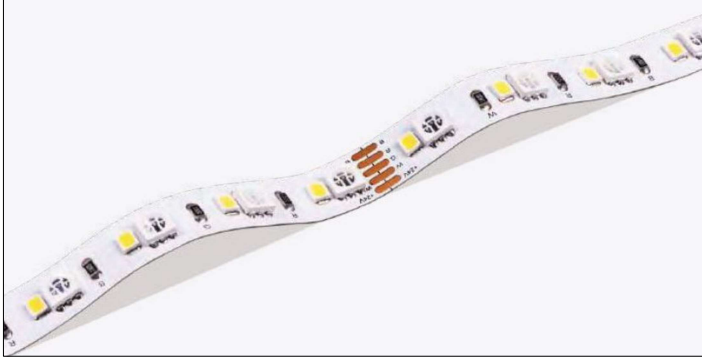

FEATURES

Alternating 3-in-1 LEDs with 3000K warm white LEDs provide a dynamic color range that extends past traditional RGB. RGBW lighting combines RGB with white color mixing to create millions of color possibilities while maintaining even greater brightness and overall color saturation.

- RGB+white color mixing capability.
- Wattage output available in 4.87 W/ft.
- Cuttable every 2".
- 17.5 foot max run.
- IP54 rating featuring nano-coating protective layer (Standard) - Consult factory for other options .
- 50,000 hours rated life.


CONTROL OPTION

- RGBW Controls
 - Requires Adaptive Driver + Smart Receiver
- DMX Controls
 - Requires Adaptive Driver + DMX Receiver
- RGBW In-line Controller


QUICK SPECIFICATION

- **VOLTAGE** : 24V
- **WATTAGE** : 4.87W / ft
- **LUMENS** : Up to 250 Lm / ft,
- **CCT** : RGB + Warm White (3000K/4000K/6500K) (3 IN 1 LEDs + 1 LEDs)
- **CUTTING POINTS** : ~ 2" (50mm)
- **IP RATING** : IP54 - Standard, IP67 - Silicon Tube, IP68 - Silicone TUBE +Resin
- **DIMMING** : 5-100%
- **CERTIFICATIONS** : cULus Listed - Dry / Damp Location
- **RATED LIFE** : 50,000 Hours


DIMENSIONS

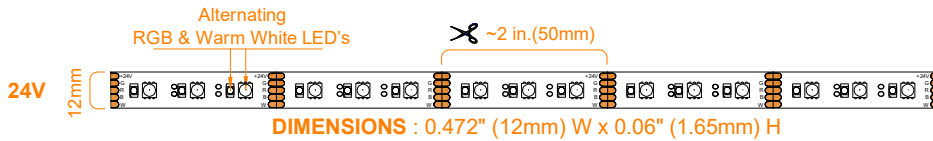


IP54 NonWaterproof



IP67 Waterproof




IP68 Waterproof



FIXTURE RATINGS & CERTIFICATIONS



ORDERING KEY



1 - MODEL #	2 - LENGTH	3 - VOLTAGE	4 - CCT	5 - LED OUTPUT - LED QTY (pcs/ft) - CUT POINT (in) - MAX RUN (ft)	6 - IP RATING
LUM-RGB+W 3 IN 1 + 1	2 - 2 ft 4 - 4 ft 6 - 6 ft 8 - 8 ft 10 - 10 ft X'-X" - CSTM	24V DC	RGB+3000K RGB+4000K RGB+6000K	OP1 (24V) - 4.87 W/ft - 36 pcs/ft - 6 LED (2 in) - 17.5 ft MAX	IP54 - Standard IP67 - Silicon Tube IP68 - Silicon Tube +Resin
COMMENT					

LUMIYO TAPE LIGHT SERIES QUICK SET-UP GUIDE

